


Assembly Instructions LUGIT 185/300


- Assemble the components over the Lugs and onto the Cables.



- Connect the Lugs into the joining block and tighten with a spanner.
- Ensure the Backshell Keys are correctly positioned to mate with each other.
- Rotate the central locking ring until locks into the mated position, then tighten both backnuts.

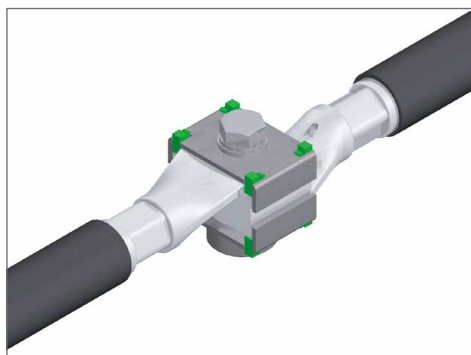

- Lock the Central Locking Ring using the remote locking / release key.

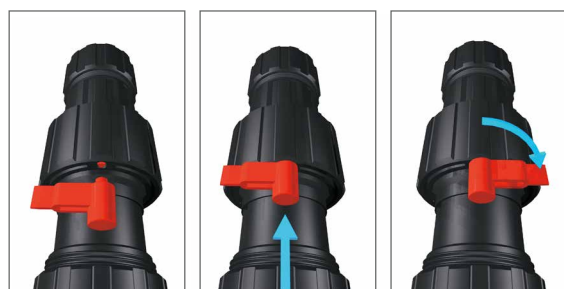

- Fit Coloured identification bands if required.